

SITE LIGHTING

- | Chain & String Lighting
- | Task Lighting
- | Batten Lighting
- | Flood Lighting
- | Cable Management
- | Temporary Power Equipment




RAPID LIGHT DAISY CHAIN SYSTEM

SKU:

6180-SL100DC

A brilliant solution for illuminating large areas. With up to a 200-meter range and a wide 120-degree beam angle, these lights are suitable for lighting up both the interior and exterior of your construction site.

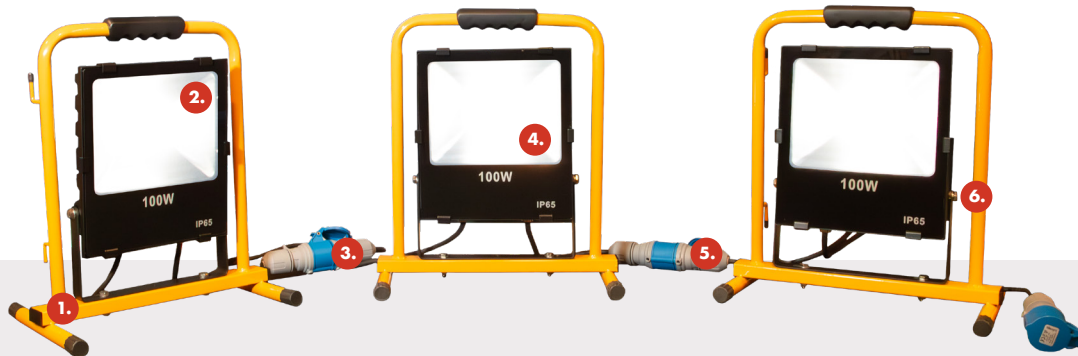

1. ALUMINIUM DIE-CAST BODY

Ensuring durability and corrosion-resistance

2. 100W LAMP & 11000 LUMENS

Ensuring effective lighting output

3. DAISY CHAINING

Power inlet & outlet for daisy chaining

4. 200m RANGE

For optimal lighting distribution

5. 16AMP PRE-FITTED CARAVAN PLUGS

Robust makeup for harsh outdoor environments

6. 4.4KG

Easy transportation and installation



I SITE LIGHT - LED FLOODLIGHT

SKU:	WATTAGE:	RATING:	LUMENS:	CABLE:
6180-K1506H	100W	IP65	8000	Standard
6180-K1509H	200W	IP65	16000	Standard

- 3m cable and plug fitted
- Ideal for exterior site lighting
- Can be fixed to hoarding and cranes
- Steel frame for self-standing



Call us **0800 23 57 89** or Email sales@powerpac.co.nz

I SITE LIGHT - WORK LIGHT

UPRIGHT WORK LIGHT ON TRIPOD

SKU:	WATTAGE:	RATING:
6180-K1375L	60W	IP44

- Light Output: 3200 Lumens
- Very minimal fire risk due to low heat output
- Single power take-off to enable linking to additional lights



I SITE LIGHT - UPLIGHT

LED BATTERY TASK UPLIGHT

SKU:	WATTAGE:	RATING:
6180-K1118R	50W	IP44

- Light Output: 4000 Lumens with a 360-degree beam spread
- Weight: 4kg
- Working Time: 3 hours
- Impact-resistant polycarbonate lens
- Suitable for outdoor and indoor use
- Includes charger
- Zero heat output



I SITE LIGHT - LED 1200mm TEMPORARY BATTEN LIGHT

SKU:	WATTAGE:	RATING:	LUMENS:	WEIGHT:
6180-K6061	45W	IP65	4500	4.7kg

- Voltage: 220V - 240V
- 5m cable
- 16-amp plugs for daisy-chaining
- Includes brackets for mounting/hanging



I SITE LIGHT - LED 600mm TEMPORARY BATTEN LIGHT

SKU:	WATTAGE:	RATING:	LUMENS:	SIZE:
6180-K6060B	25W	IP65	2200	600mm

- Voltage: 240V
- 5m cable
- Comes with an emergency backup battery for power failure
- Includes brackets for mounting/hanging
- 16-amp plugs for daisy-chaining
- LED automatically stays on after disconnection or loss of power for one hour



POWERPAC LEAD HOOKS

SKU: 6181-LH20R QTY: 20pk



LEAD STAND

SKU: 618-LEADSTAND HEIGHT: 1.3m - 2.5m

- Capacity: 10 leads/6 hoses up to 30mm in diameter
- Solid construction with a foldable base



SITE LIGHT - LED CHAIN LIGHTS

SKU: 6180-CL25LED WATTAGE: 12W Lamps LUMENS: 1500 per Lamp

- 10 x 12W lamps
- Heavy-duty rubber cable
- 16-amp caravan plugs & sockets
- IP65 rated
- Low heat output
- Daisy-chainable



SITE LIGHT - TRIPOD TWIN LIGHT

SKU: 6180-K1189TW WATTAGE: 30W RATING: IP44

- Light Output: 4200 lumens
- Voltage: 220 - 240V / 50Hz
- Super LED power: 2 x 30W
- Aluminium die-cast body
- Tempered glass
- 3m cable
- Very minimal fire risk due to low heat output
- IP65 Rated



EXTENSION LEADS

SKU: LENGTH:

EL153T 30m

- Supplied tagged
- LED light power indicator
- 10A lead
- Complies with standard: AS/NZS 3112:2000



Heavy duty

2 CHANNEL CABLE COVER

SKU: SIZE:

6180-CC1025 1m x 250mm x 45mm



4kg

LIFEGUARD POWER SUPPLY BOX

SKU: OUTLETS:

LG6.4P 4

LG6.6P 6

- 10-amp capacity single-phase power box
- RCD trip protected

4 Outlets with single phase three pin plug

6 Outlets with single phase three pin plug




SOLAR LED STREET LIGHT

SKU: WATTAGE: SIZE: LUMENS: RATING: WEIGHT:

6180-SL150 150W

6180-SL200 200W 1.15m x 350mm x 160mm 18,000 lm IP65 10.3kg

- Solar Power: 10V, 88W (high-efficiency monocrystalline silicon)
- Charge Time: 72 hours with enough sunlight
- Working Time: More than 30 hours
- Battery Type: Lithium battery 6.4V 35Ah
- Beam Angle: 120°
- Recommended Installation Height: 6-8m
- Material: Aluminium Alloy + PET

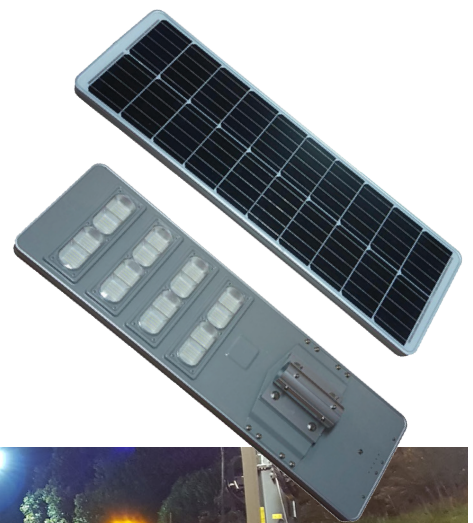

Sitemate Temporary Power Distribution

Talk to us about having these power units on your site today!

Specifications:

- Third-party tested
- Recessed design to minimise potential damage to outlets
- Industrial sockets can be replaced without opening the unit
- Designed for reduced maintenance costs
- Stable footprint to minimise risk of toppling
- Assembled with trade-tested components
- Designed for NZ & AU conditions

Main Applications:

- Used for temporary power reticulation
- Construction industry
- Heavy industry
- Indoor/outdoor events
- Ports



SITEMATE TEMPORARY POWER UNIT

SKU:	AMP:	SIZE:
SM16	32A	634mm L x 501mm W x 500mm H
SM17	63A	741mm L x 504mm W x 605mm H

SITEMATE TEMPORARY POWER LEADS

SKU:	AMP:	LENGTH:
SML3210	32A	10m
SML3220	32A	20m
SML3230	32A	30m
SML6310	63A	10m
SML6320	63A	20m
SML6330	63A	30m



ROBUST DESIGN

Impact-resistant, robust design for outdoor use



MULTIPLE CARRY POINTS

Designed for easy transportation



BOLT DOWN ANCHOR POINTS

For added security on site



STACKABLE DESIGN

Stackable for easy storage